


# Revox Invisible Speaker (INV)

TECHNICAL DATA SHEET

**REVOX**  
Studio Sound Quality

## INV 40 PE

Surface loudspeakers with integrated passive equalization, installed invisibly under plaster, paint or wallpaper. Flat radiation characteristics. With special polymer membrane for integration in dry construction, solid construction, walls and ceilings. Indoor use.

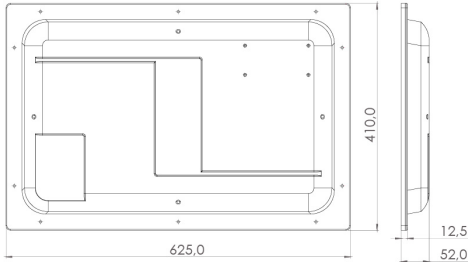

## TECHNICAL DATA

	INV 40 PE
Order Number	1.084.674.00
Dimensions L x W x D (mm)	652 x 410 x 52
Min. installation depth (mm)	40
Weight (kg)	1.9
Capacity (Watt)	40
Impedance (Ohm)	4
Sensitivity	85 dB/1W/1m
Frequency range	80 Hz - 20 kHz
Passive equalization	integrated
Suitable for outdoors	X

## ACCESSORIES

	INV 40 PE
Installation frame available	✓
Sprue housing available	✓
1K PU special adhesive	✓
Passive protection circuit	✓

Note: Coatings affect the efficiency. INV 40 PE allows a coating of max. 2 mm. The installation instructions are to be taken into account for standard installations. Special fixtures after consultation with support.