


# Revox Invisible Speaker

## TECHNICAL DATA SHEET

**REVOX**  
Studio Sound Quality

### INV UNIT MK II

Panel loudspeakers installed invisibly under plaster, paint or wallpaper. Flat radiation characteristics. Full-range speaker with special polymer membrane equipped with high-performance subwoofer and exciter. Especially for invisible integration in drywall, solid construction, walls and ceilings. Can also be used behind wood with pocket milling.

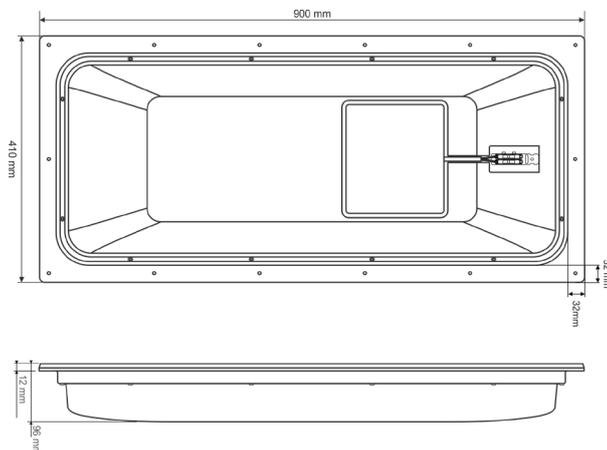

### TECHNICAL DATA

	INV UNIT MK II
Order Number	108469640
Dimensions L x W x D (mm)	900 x 410 x 96
Min. installation depth (mm)	96
Weight (kg)	10,3
Capacity (Watt)	max. 150 W RMS
Impedance (Ohm)	4
Sensitivity	82 dB/1W/1m
Frequency range	35 Hz - 27 kHz
Suitable for moisture	X

### EQUIPMENT

	INV UNIT MK II
Installation frame available	✓
Sprue housing available	✓
1K PU special adhesive	✓

Note: Coatings influence the efficiency. The installation instructions are to be taken into account for standard installations. Special fixtures after consultation with the sales consultant.