

Revox Invisible Speaker (INV)


TECHNICAL DATA SHEET

REVOX
Studio Sound Quality

INV 40 stereo

INV 40 stereo carbon

Surface loudspeakers as a stereo version with high efficiency, installed invisibly under plaster, paint or wallpaper. Flat radiation characteristics. With special polymer membrane for integration in dry construction, solid construction, walls and ceilings. Carbon version: Thanks to the special carbon membrane, the loudspeaker is particularly suitable for outdoor use and also under special temperature conditions (-20 degrees / + 80 degrees Celsius) and temperature fluctuations.

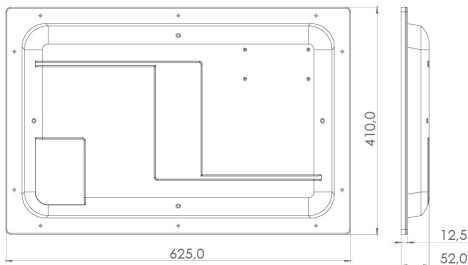

TECHNICAL DATA

	INV 40 stereo	INV 40 stereo carbon
Order Number	1.084.673.00	1.084.675.00
Dimensions L x W x D (mm)	625 x 410 x 52	625 x 410 x 52
Min. installation depth (mm)	40	40
Weight (kg)	1,7	1,65
Capacity (Watt)	2 x 20	2 x 20
Impedance (Ohm)	8_8	8_8
Sensitivity	85 dB/1W/1m	92 dB/1W/1m
Frequency range	80 Hz - 20 kHz	80 Hz - 20 kHz
Suitable for outdoors	X	✓

ACCESSORIES

	INV 40 stereo	INV 40 stereo carbon
Installation frame available	✓	✓
Sprue housing available	✓	✓
1K PU special adhesive	✓	✓
Passive protection circuit	✓	✓

Note: Coatings affect the efficiency. The Invisible Speakers must be equipped with an analogue (passive protective circuit) or DSP-based high-pass filter 18 dB / 100 Hz in the signal path prior to commissioning. The installation instructions are to be taken into account for standard installations. Special fixtures after consultation with support.