


# Revox Invisible Speaker (INV)

TECHNICAL DATA SHEET

**REVOX**  
Studio Sound Quality

## INV 40 aqua slim

Surface loudspeaker particularly suitable for invisible background sound in rooms with increased humidity such as bathrooms and swimming pools. With polymer, moisture-protected special membrane for integration in dry construction, solid construction, walls and ceilings. Preferably on and in expansion panels to improve the room acoustics made of glass granulate expanded glass panels.

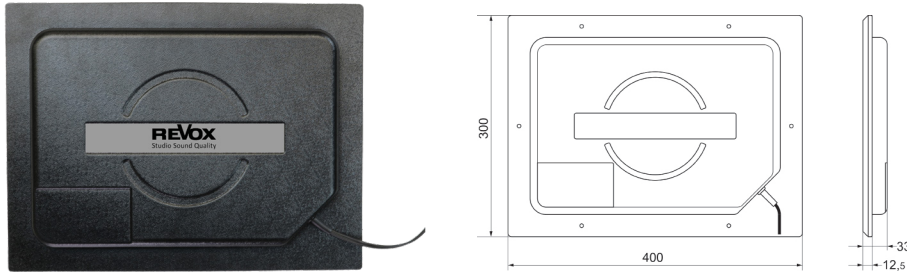

## TECHNICAL DATA

	INV 40 aqua slim
Order Number	1.084.663.00
Dimensions L x W x D (mm)	400 x 300 x 33
Min. installation depth (mm)	26
Weight (kg)	ca. 1
Capacity (Watt)	40
Impedance (Ohm)	4
Sensitivity	85 dB/1W/1m
Frequency range	120 Hz - 19 kHz
Suitable for outdoors	X

## EQUIPMENT

	INV 40 aqua slim
Installation frame available	✓
Sprue housing available	X
1K PU special adhesive	✓
Passive protection circuit	✓

Note: Coatings affect the efficiency. The Invisible Speakers must be equipped with an analogue (passive protective circuit) or DSP-based high-pass filter 24dB / 120 Hz in the signal path prior to commissioning. The installation instructions are to be taken into account for standard installations. Special fixtures after consultation with support.